



## Total Trellis Systems

Manufactured in Australia



- Available in 2.4mm thick G450 High tensile steel
- **GALFAN Coating** 5% Aluminium, Rare Metals, 95% Zinc, the ultimate in corrosive resistant coating
- **86mm wide** to alleviate vine crowding
- First in post
- Outside rows for excessively windy sites
- **Unique profile** to enhance strength and in ground rigidity
- **Uniquely angled, strengthened and rounded** edge wire holes
- **Robust design** for barrel pruning and machine harvesting
- **Quick and easy to install**, no staples
- **Australian designed, made and owned**



*Ocloc products are carbon neutral — 100% carbon offset —*



For further details please contact


**Ocvitti Australia**  
Nigel Catt 0418 832 967  
Visit us at [www.ocloc.com.au](http://www.ocloc.com.au)

**Admin@ocloc.com.au**  
[nigel@ocloc.com.au](mailto:nigel@ocloc.com.au)







## Total Trellis Systems

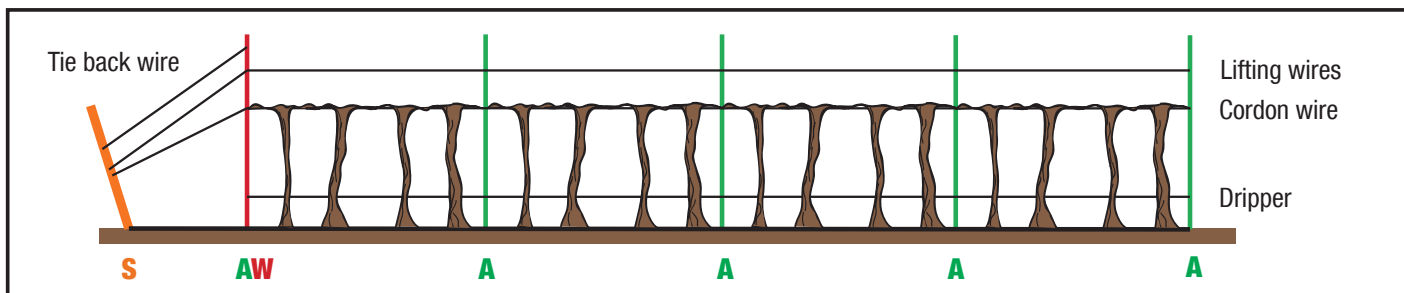

### Alternative Trellis Structure

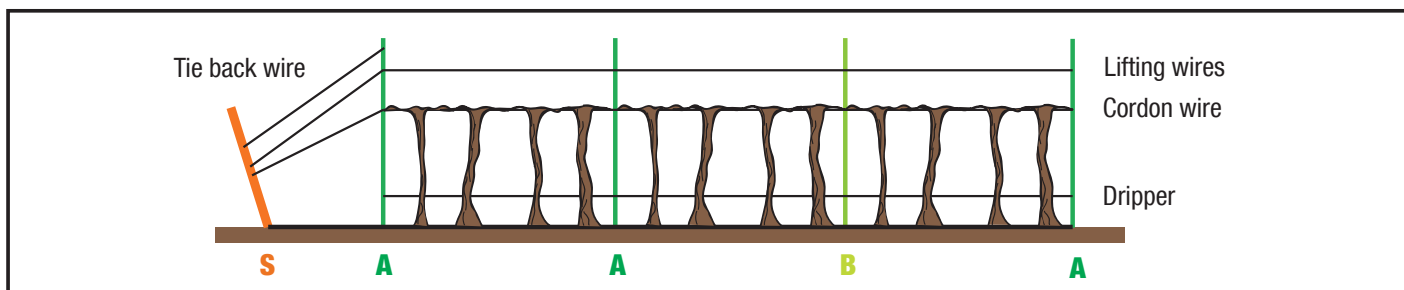

Rounded wire holes.




Anti Sink Plate




Ocloc NSC - Netting Spray Cap.

<b>A</b>	Trellis post
<b>B</b>	Intermediate
<b>S</b>	Strainer
<b>AW</b>	Large post



VSP 20° angle.




TWS 30° angle.




Dripper wire.


- **Ocloc AW** posts can be ordered in wire spacing and trellis configuration to suit specific vineyard requirements.
- **GALFAN** for corrosion resistance. More information can be found at: [www.galfan.com](http://www.galfan.com)
- Bundles of 150
- **75mm** and **150mm** wire spacing
- Available in VSP or TWS.
- Available in several lengths



75mm wire hole spacing.



150mm wire hole spacing.



Curved edges to protect mechanical picking rods & pruning knives.

1.8m - 6 feet	2.1m - 7 feet
2.4m - 8 feet	2.7m - 8 feet

